

FEATURES

South-Tek's AutoPurge Timer eliminates the continuous venting of the AutoPurge System/s by closing the purge after 98%+ nitrogen (i.e. the desired purity level to inhibit corrosion) has had sufficient time to cycle throughout the FPS.


- | Purge automatically turns to the "closed" position after 5 weeks (field adjustable)
- | Manual reset to resume purging when the FPS is tested or trips

1 Zone Timer

- | Connects to (1) N₂Blast - AutoPurge System
- | To be wall mounted within 4,57m of the AutoPurge System
- | Provided with 4,57m of 6.35mm plenum rated tubing

6 Zone Timer

- | Connects to up to (6) N₂Blast - AutoPurge System
- | Wall mountable at a central location within the building
- | Provided with 152,4m of 6.35mm plenum rated tubing

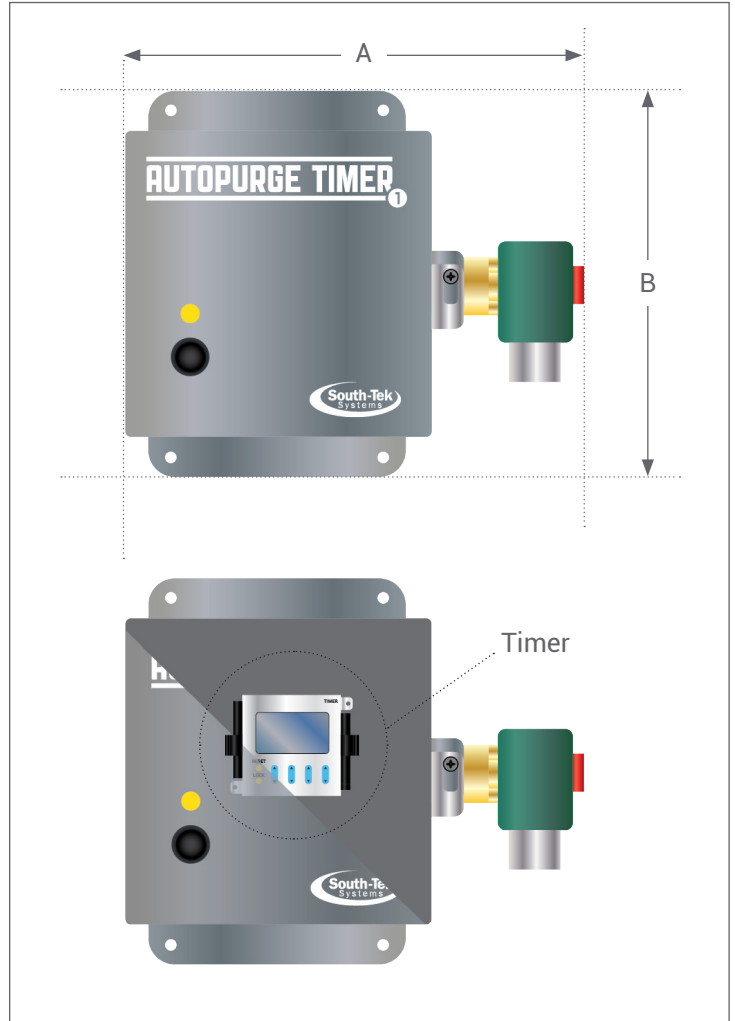

UNIT DETAILS

	AutoPurge Timer - 1 Zone	AutoPurge Timer - 6 Zone
Part Number		
	A02-QCF-PST	A02-QCF-6PST
Dimensions		
A (Width)	160mm	160mm
B (Height)	160mm	160mm
C (Depth)	111mm	111mm
Weight	3,17kg	3,63kg
Unit Details		
Electrical	220V / 50Hz / 1Ph, 1 AMP	
Warranty	One Year ¹	

1. Per Manufacturer's Terms & Conditions.