


## DUAL VENT O<sub>2</sub>-RELEASE FEATURES

- | FailSafe™ design works as a true water stop – water will not overflow as it would with other redundant vent designs
- | Water accumulation fully drains back to FPS by depressurizing FPS and pressing reset button on Air Release Valve
- | Lightweight design with low height clearance and only one connection to the piping makes for easy installation
- | Primary Air Release Valve Failure Alarm with audible buzzer and visual LED indicator
- | FM Approved Air Release Valve
- | Meets 2016 NFPA 13-7.1.5 vent requirement
- | 9V Lithium ion battery with low battery buzzer and visual LED indicator

## UNIT DETAILS

O <sub>2</sub> -Release	
Part Number	
Dual Vent	A03-A-001
Dimensions	
A (Width)	438,65mm
B (Height)	199,64mm
C (Full Height)	282,45mm
D (Diameter)	120,65mm
Weight	4,76kg
Warranty	One Year <sup>1</sup>

1. Per Manufacturer's Terms & Conditions.

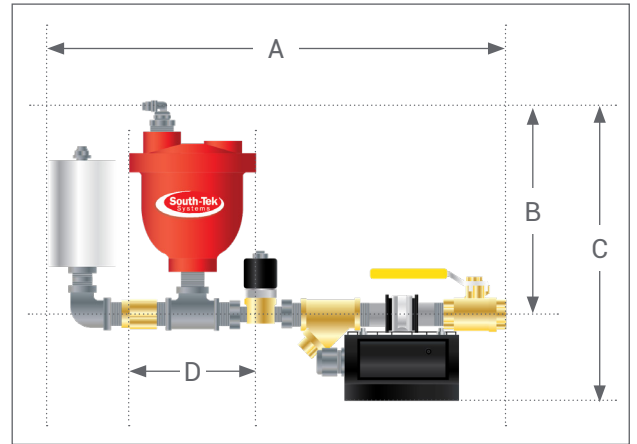

## SINGLE VENT O<sub>2</sub>-RELEASE FEATURES

- | Displaces corrosive trapped air from within sprinkler piping
- | Does not create a water trap—valve fully drains back to FPS
- | Recommend (1) per high point of FPS
- | Low clearance height - easy high point install
- | Meets 2016 NFPA 13-7.1.5 vent requirement

## UNIT DETAILS

O <sub>2</sub> -Release	
Part Number	
Single Vent	A03-AV
Dimensions	
A (Width)	279,4mm
B (Height)	146mm
C (Full Height)	193mm
D (Diameter)	66,67mm
Weight	1.81kg
Warranty	One Year <sup>1</sup>

1. Per Manufacturer's Terms & Conditions.

